


VigorSwitch Q2200x/PQ2200xb

20埠L2+管理型2.5G 交換器



居易科技VigorSwitch Q2200x 系列是 Layer 2+ 管理型 10Gbps 網路交換器，備有16個2.5G LAN埠口以及4個SFP+光纖接口提供高速資料傳輸。支援進階的Layer3功能，包含DHCP伺服器以及VLAN路由功能，提升網路使用效率並確保穩定的網路連線，即使WAN端網路斷線也不影響你的LAN端網路，是中小企業理想的中心端網路交換器選擇。

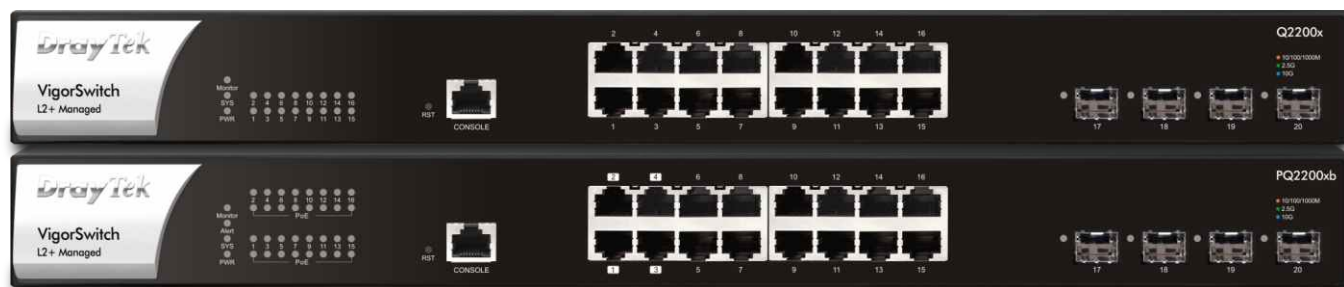

↑ Console Port ↑ 16x 2.5G Ethernet ↑ 光纖插槽

介面

LAN	16x 10/100/1000/2500Mbps Ethernet, RJ-45 4x 1000Mbps/10Gbps SFP+ 光纖插槽
Console埠	1 x RJ-45
按鍵	1 x 重置鍵

效能

封包緩衝區	12 Mbit
背板頻寬	160 Gbps
交換轉送率	119.04 Mpps (64 bytes)
MAC位址數量	16k
巨型封包	最多 10KB
L3路由表數量	6k static route + 512 prefix route

PoE (PQ2200xb)

支援PoE埠數	4x PoE/PoE+/PoE++ (802.3af/at/bt), 每個端口最高供電90瓦, Type mode A 12x PoE/PoE+ (802.3af/at), 每個端口最高供電30瓦, Type mode A
PoE 總供電量	400 watts
供電量限制	•
排程啟用/停用電源	•
重啟電源	手動, Auto by Ping check timeout

Layer 3 Features

Static Route	•
VLAN Route	•
DHCP Server	•

網路協定

IP Version	IPv4, IPv6
Ethernet 標準	802.3af PoE/802.3at PoE+/ 802.3bt PoE++ (PQ2200xb) 802.3 10Base-T/802.3u 100Base-T/ 802.3ab 1000Base-T 802.3bz 2.5GBase-T/802.3ae 10GBase-X 802.3x Flow Control 802.3 Auto-Negotiation 802.1q Tag-based VLAN 802.1p Class of Service 802.1d STP 802.1w RSTP 802.1s MSTP 802.3ad LACP 802.1ad QinQ 802.1x Port Access Control 802.1AB LLDP 802.3az EEE

VLAN

Max.Number of VLAN	512
VLAN Type	802.1q Tag-based MAC-based Protocol-Based Management VLAN Voice VLAN Surveillance VLAN
802.1x Guest VLAN	•
Port Isolation	•
GVRP	•
Q-in-Q	Basic

ONVIF Surveillance

Discovery	•
Surveillance Topology	•
Real-Time Video Streaming	•
ONVIF Device Maintenance	Device Info, Reset Factory Default, Time Settings, Reboot

Security

Access Control List	MAC, IPv4, IPv6
Storm Control	Broadcast, Unknown Multicast, Unknown Unicast
DoS Defense	•
802.1x Port Access Control	•
IP Source Guard	•
IP Conflict Detection/Prevention	•
Loop Protection	•
Dynamic ARP Inspection	•
DHCP Snooping with Option 82	•

AAA

Authentication Server	RADIUS, TACACS+
Port Authorization	•
Management Account	•
RADIUS Attribute Assignment	User Privilege, VLAN
Accounting	•
Multiple Server	•

QoS

Number of QoS Queues	8
Queue Scheduling	SPQ, WRR
CoS (Class of Service)	802.1p CoS, DSCP, CoS-DSCP, IP Precedence
Rate Limit & Shaping	•

Link Aggregation

Max. Number of Group	8
Max. Number of Member in Each Group	8
Type	Static, LACP
Traffic Load Balancing	MAC Address, IP/MAC Address

Multicast

IGMP Snooping	v2, v3 (BISS)
IGMP Querier	•
MLD Snooping	v1, v2 (Basic)
Max. Number of Multicast Group	256
Group Throttling	•
Group Filtering	•
MVR (Multicast VLAN Registration)	•

Management

Web Interface	HTTP, HTTPS
Command Line Interface	Telnet, SSH v2
OpenVPN Client	Certificate-based authentication
User Authentication	Local Database, RADIUS, TACACS+
sFlow	•
SNMP	v1, v2c, v3
Private MIB	•
RMON Group	1, 2, 3, 9
LLDP	LLDP-MED, Media Endpoint Discovery Extension
Mail Alert	Port Status, Port Speed, System Restart, IP Conflict
Syslog	•
2-Level Admin Privilege	•
Multiple Admin Accounts	•
Managed by Vigor Router SWM	•
Managed by VigorConnect	•
Managed by VigorACS 3	•
Config File Export/Import	•
Dual Image	•
SNTP	•
Diagnostics Tools	Port Mirroring, Ping, Cable Test , Fan Test

物理特性

操作溫度範圍	0 to 50°C
儲存溫度範圍	-20 to 70°C
操作濕度範圍	10 to 90% non-condensing
儲存濕度範圍	5 to 90% non-condensing