

24 Port Nway Gigabit Ethernet Web Smart Switch

User's Manual

Web Smart Switch

I . Features Overview

- Supports real-time status (link, speed, duplex) of each port
- Supports port setting for enable or disable operation (the 1st port can't be disabled)
- Supports port setting for N-Way or force mode operation
- Supports Broadcast Storm Protection
- Supports Port-bases VLAN
- Supports priority queues for QoS

II . Configure


Please follow the steps to configure this Web Smart switch.

Step 1:

Use a twisted pair cable to connect this switch to your PC.


Step 2:

Set your PC's IP to 192.168.2.xx.

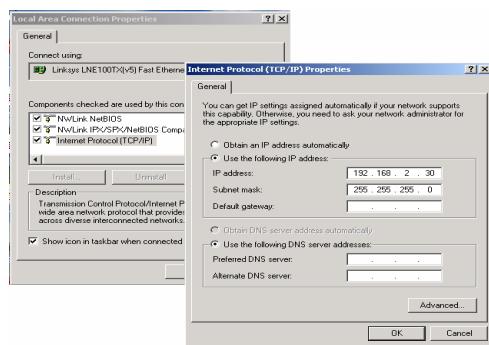

Step 3:

Open the browser (like IE...) and go to http:// 192.168.2.1
You will see the login screen as below:

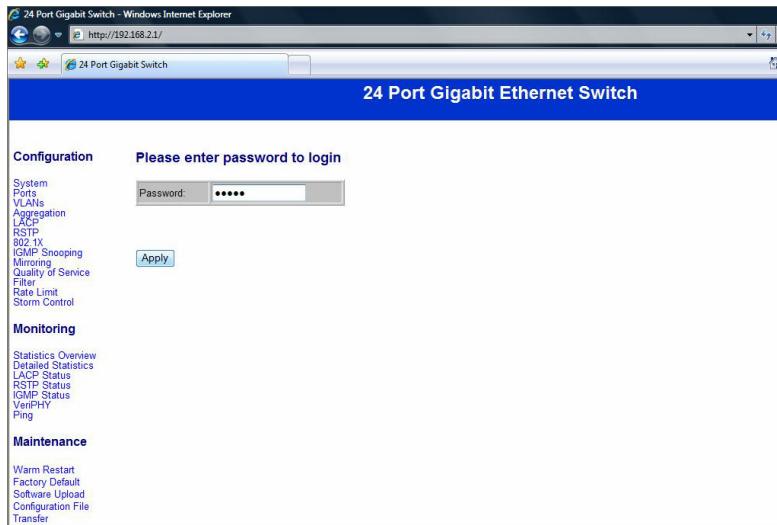

Please key in the password to pass the authentication.

Password: admin

After the authentication procedure, the switch can be used now.

Step 4:

On the home page, select the configuration by clicking the icon as below:

- **Configuration**
- **Monitoring**
- **Maintenance**
- **Logout**

Configuration: System Configuration

The screenshot shows a Windows Internet Explorer window with the URL <http://192.168.2.1/>. The title bar says "24 Port Gigabit Switch". The main content area has a blue header "24 Port Gigabit Ethernet Switch". On the left, there's a sidebar with links for "System", "Ports", "VLANs", "Aggregation", "LACP", "RSTP", "802.1x", "IGMP Snooping", "Mimicing", "Quality of Service", "Filter", "Rate Limit", "Storm Control", "Monitoring", "Statistics Overview", "Detailed Statistics", "LACP Status", "RSTP Status", "IGMP Status", "VenPHY", "Ping", "Maintenance", "Warm Restart", "Factory Default", "Software Upload", "Configuration File Transfer", and "Logout". The "System Configuration" section contains two tables. The first table under "System" has rows for MAC Address (00-03-ce-07-06-f0), S/W Version (Lutron24.2.34d), H/W Version (1.0), Temperature (0 °C), Active IP Address (192.168.2.1), Active Subnet Mask (255.255.255.0), Active Gateway (192.168.2.254), DHCP Server (0.0.0.0), and Lease Time Left (0 secs). The second table under "Maintenance" has rows for DHCP Enabled (checkbox checked), Fallback IP Address (192.168.2.1), Fallback Subnet Mask (255.255.255.0), Fallback Gateway (192.168.2.254), Management VLAN (1), Name (empty input field), and Password (empty input field).

MAC Address	00-03-ce-07-06-f0
S/W Version	Lutron24.2.34d
H/W Version	1.0
Temperature	0 °C
Active IP Address	192.168.2.1
Active Subnet Mask	255.255.255.0
Active Gateway	192.168.2.254
DHCP Server	0.0.0.0
Lease Time Left	0 secs

DHCP Enabled	<input checked="" type="checkbox"/>
Fallback IP Address	192.168.2.1
Fallback Subnet Mask	255.255.255.0
Fallback Gateway	192.168.2.254
Management VLAN	1
Name	
Password	

It shows system status, such as: MAC address, system firmware version and so on.

You can change the user name, the password and IP address, and click “Apply” to confirm the new change.

Afterwards, you can reset the switch by turning off and turning on it to take the new user name, the password and IP address effectively.

Configuration: Port Configuration

The screenshot shows a web-based configuration interface for a 24 Port Gigabit Ethernet Switch. The main title bar reads "24 Port Gigabit Ethernet Switch". On the left, there's a navigation menu with sections like Configuration, Monitoring, and Maintenance. Under Configuration, there are links for System, Ports, VLANs, Accounting, LACP, RSTP, 802.1X, IGMP Snooping, Mirroring, Quality of Service, Filter, Rate Limit, and Storm Control. The main content area is titled "Port Configuration". It includes a checkbox for "Enable Jumbo Frames" which is checked. Below it is a dropdown menu set to "Disable". A table lists port configurations for ports 1 through 9. The table has columns for Port, Link status, Mode, and Flow Control. Port 3 is highlighted in green and labeled "1000FDX". All other ports (1, 2, 4, 5, 6, 7, 8, 9) have "Down" in the Link column and "Auto Speed" in the Mode column.

Port	Link	Mode	Flow Control
1	Down	Auto Speed	<input type="checkbox"/>
2	Down	Auto Speed	<input type="checkbox"/>
3	1000FDX	Auto Speed	<input type="checkbox"/>
4	Down	Auto Speed	<input type="checkbox"/>
5	Down	Auto Speed	<input type="checkbox"/>
6	Down	Auto Speed	<input type="checkbox"/>
7	Down	Auto Speed	<input type="checkbox"/>
8	Down	Auto Speed	<input type="checkbox"/>
9	Down	Auto Speed	<input type="checkbox"/>

You can enable or disable Jumbo Frames by clicking the checking box.

Select the “Port no.” which you want to configure the mode below,

- Auto speed
- enable/disable the port
- 10M/100M/1000M
- full/half-duplex
- enable/disable flow control

Configuration: VLAN Configuration

The screenshot shows a web-based management interface for a 24 Port Gigabit Ethernet Switch. The URL in the address bar is <http://192.168.2.1/>. The main title is "24 Port Gigabit Switch". On the left, there's a navigation menu with the following items:

- System
- Ports
- VLANs** (highlighted)
- Aggregation
- LACP
- RSTP
- 802.1Q
- IGMP Snooping
- Mirroring
- Quality of Service
- Filter
- Rate Limit
- Storm Control

Monitoring

- Statistics Overview
- Detailed Statistics
- LACP Status
- RSTP Status
- 802.1Q Status
- VerPHY
- Ping

Maintenance

- Warm Restart
- Factory Default
- Software Upload
- Configuration File Transfer

The central panel is titled "Port Segmentation (VLAN) Configuration" and contains the following sections:

- Add a VLAN**: A form with a "VLAN ID" input field containing "1" and an "Add" button.
- VLAN Configuration List**: A table with one row and six columns. The first column contains the number "1". Below the table are "Modify", "Delete", and "Refresh" buttons, and a "Port Config" button.

There are 16 VLAN groups.

Select and add a group into “VLAN ID” and then click the port number which you want to put into the selected VLAN group.

Configuration: Aggregation/Trunk Configuration

The screenshot shows a web-based management interface for a 24 Port Gigabit Ethernet Switch. The title bar reads "24 Port Gigabit Switch - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/". The main header is "24 Port Gigabit Ethernet Switch". On the left, there's a sidebar with navigation links: Configuration (System, Ports, VLAN, Aggregation, LACP, RSTP, 802.1X, IGMP Snooping, Mirroring, Quality of Service, Filter, Rate Limit, Storm Control), Monitoring (Statistics Overview, Detailed Statistics, LACP Status, RSTP Status, IGMP Status, VenPHY, Ping), and Maintenance (Warm Restart, Factory Default, Software Upload, Configuration File Transfer). The main content area is titled "Aggregation/Trunking Configuration". It features a table where ports 1 through 24 can be assigned to one of eight groups (Group 1 to Group 8). The first row is labeled "Normal". The table has 8 rows for groups and 24 columns for ports. Buttons for "Apply" and "Refresh" are at the bottom of the table.

Group	Port	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Normal		<input checked="" type="radio"/>																							
Group 1		<input type="radio"/>	<input type="radio"/>																						
Group 2		<input type="radio"/>	<input type="radio"/>																						
Group 3		<input type="radio"/>	<input type="radio"/>																						
Group 4		<input type="radio"/>	<input type="radio"/>																						
Group 5		<input type="radio"/>	<input type="radio"/>																						
Group 6		<input type="radio"/>	<input type="radio"/>																						
Group 7		<input type="radio"/>	<input type="radio"/>																						
Group 8		<input type="radio"/>	<input type="radio"/>																						

Buttons: Apply, Refresh

Set up port trunk groups and then click the port number you want to include into the same group.

There are eight groups to choose and the maximum for one group is 24 ports.

Configuration: LACP Port configuration

Port	Protocol Enabled	Key Value
1	<input type="checkbox"/>	auto
2	<input type="checkbox"/>	auto
3	<input type="checkbox"/>	auto
4	<input type="checkbox"/>	auto
5	<input type="checkbox"/>	auto
6	<input type="checkbox"/>	auto
7	<input type="checkbox"/>	auto
8	<input type="checkbox"/>	auto
9	<input type="checkbox"/>	auto
10	<input type="checkbox"/>	auto
11	<input type="checkbox"/>	auto
12	<input type="checkbox"/>	auto
13	<input type="checkbox"/>	auto
14	<input type="checkbox"/>	auto
15	<input type="checkbox"/>	auto

Select the port number which you want to enable/disable its protocol.

Configuration: RSTP Configuration

The screenshot shows a web-based configuration interface for a 24 Port Gigabit Ethernet Switch. The title bar reads "24 Port Gigabit Switch - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/". The main content area has a blue header "24 Port Gigabit Ethernet Switch".

Configuration

RSTP System Configuration

System Priority	32768
Hello Time	2
Max Age	20
Forward Delay	15
Force version	Normal

Monitoring

RSTP Port Configuration

Port	Protocol Enabled	Edge	Path Cost
Aggregations	<input type="checkbox"/>	<input checked="" type="checkbox"/>	auto
1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	auto
2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	auto
3	<input type="checkbox"/>	<input checked="" type="checkbox"/>	auto
4	<input type="checkbox"/>	<input checked="" type="checkbox"/>	auto
5	<input type="checkbox"/>	<input checked="" type="checkbox"/>	auto
6	<input type="checkbox"/>	<input checked="" type="checkbox"/>	auto

Maintenance

- Warm Restart
- Factory Default
- Software Upload
- Configuration File Transfer

Select the port number which you want to enable/disable its protocol.

Configuration: 802.1x Configuration

802.1X Configuration

Mode:	Disabled
RADIUS IP:	0.0.0
RADIUS UDP Port:	1812
RADIUS Secret:	[REDACTED]

Port	Admin State	Port State	Re-authenticate	Force Reinitialize	Statistics
1	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
2	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
3	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
4	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
5	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
6	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
7	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
8	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
9	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
10	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics
11	Force Authorized	802.1X Disabled	Re-authenticate	Force Reinitialize	Statistics

Select the “Port no.” which you want to configure the mode below,

- Auto
- Force Authorized
- Force Unauthorized

Configuration: IGMP Configuration

The screenshot shows a web-based management interface for a 24 Port Gigabit Ethernet Switch. The title bar reads "24 Port Gigabit Switch - Windows Internet Explorer". The main content area has a blue header "24 Port Gigabit Ethernet Switch". On the left, there's a navigation menu with sections like Configuration, Monitoring, and Maintenance. Under Configuration, "IGMP Configuration" is selected. The main panel displays "IGMP Enabled" and a list of "Router Ports" (1 through 24) each with a checkbox. Below that is a table for "Unregistered IPMC Flooding enabled" with columns for VLAN ID, IGMP Snooping Enabled, and IGMP Querying Enabled. The first row shows VLAN ID 1 with both checkboxes checked. At the bottom are "Apply" and "Refresh" buttons.

You can enable or disable IGMP by clicking the checking box.

Select the “Port no.” which you want to configure the mode.

Configuration: Port Mirror configuration


The screenshot shows a web interface for a 24 Port Gigabit Ethernet Switch. The title bar reads "24 Port Gigabit Switch - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/". The main content area has a blue header "24 Port Gigabit Ethernet Switch". On the left, there's a sidebar with navigation links: System, Ports, VLANs, Aggregation, LACP, RSTP, 802.1x, IGMP Snooping, Mirroring, Quality of Service, Filter, Rate Limit, Storm Control, Monitoring, Statistics Overview, Detailed Statistics, LACP Status, RSTP Status, IGMP Status, VenPHY, Ping, Maintenance, Warm Restart, Factory Default, Software Upload, Configuration File Transfer. The main table is titled "Mirroring Configuration" and has two columns: "Port" and "Mirror Source". The "Port" column lists numbers 1 through 17. The "Mirror Source" column contains 17 checkboxes, all of which are currently unchecked.

Port	Mirror Source
1	<input type="checkbox"/>
2	<input type="checkbox"/>
3	<input type="checkbox"/>
4	<input type="checkbox"/>
5	<input type="checkbox"/>
6	<input type="checkbox"/>
7	<input type="checkbox"/>
8	<input type="checkbox"/>
9	<input type="checkbox"/>
10	<input type="checkbox"/>
11	<input type="checkbox"/>
12	<input type="checkbox"/>
13	<input type="checkbox"/>
14	<input type="checkbox"/>
15	<input type="checkbox"/>
16	<input type="checkbox"/>
17	<input type="checkbox"/>

Port Mirroring is for mirror the traffic from Source port to Destination port.

Select the Destination port from port 1 to port 24, and then select the Source port by clicking the checking box of each port.

Configuration: QoS Configuration

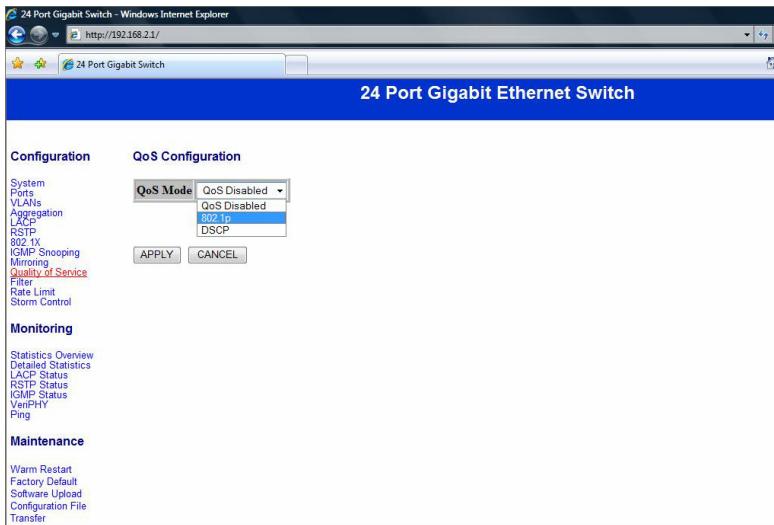

You can enable or disable QoS by clicking the checking box. If you enable QoS, you can select the class of service for each port.

Configuration: Filter Configuration

The screenshot shows a web browser window titled "24 Port Gigabit Switch - Windows Internet Explorer" with the URL "http://192.168.2.1/". The main title bar of the page is "24 Port Gigabit Ethernet Switch". On the left, there is a navigation menu with sections: Configuration, Monitoring, and Maintenance. Under Configuration, the "Filter" option is highlighted. The main content area is titled "Filter Configuration" and contains a table with 13 rows, each representing a port from 1 to 13. The columns are: Port, Mode, Source IP Filter, IP Mask, and DHCP Server Allowed. All ports are currently set to "Disabled" mode. The "Source IP Filter" and "IP Mask" columns are empty. The "DHCP Server Allowed" column contains checked checkboxes for all ports.

Port	Source IP Filter			DHCP Server Allowed
	Mode	IP Address	IP Mask	
1	Disabled			<input checked="" type="checkbox"/>
2	Disabled			<input checked="" type="checkbox"/>
3	Disabled			<input checked="" type="checkbox"/>
4	Disabled			<input checked="" type="checkbox"/>
5	Disabled			<input checked="" type="checkbox"/>
6	Disabled			<input checked="" type="checkbox"/>
7	Disabled			<input checked="" type="checkbox"/>
8	Disabled			<input checked="" type="checkbox"/>
9	Disabled			<input checked="" type="checkbox"/>
10	Disabled			<input checked="" type="checkbox"/>
11	Disabled			<input checked="" type="checkbox"/>
12	Disabled			<input checked="" type="checkbox"/>
13	Disabled			<input checked="" type="checkbox"/>

Select the “Port no.” which you want to configure the mode to enable/disable filtering IP address.

Configuration: Rate Limit Configuration

Port	Policer	Shaper
1	No Limit	No Limit
2	No Limit	No Limit
3	No Limit	No Limit
4	No Limit	No Limit
5	No Limit	No Limit
6	No Limit	No Limit
7	No Limit	No Limit
8	No Limit	No Limit
9	No Limit	No Limit
10	No Limit	No Limit
11	No Limit	No Limit
12	No Limit	No Limit
13	No Limit	No Limit
14	No Limit	No Limit
15	No Limit	No Limit
16	No Limit	No Limit

Select the “Port no.” which you want to configure the mode of the speed.

Configuration: Storm Control configuration

Storm Control Number of frames per second	
ICMP Rate	No Limit
Learn Frames Rate	No Limit
Broadcast Rate	No Limit
Multicast Rate	No Limit
Flooded unicast Rate	No Limit

1k

2k

4k

8k

16k

32k

64k

128k

256k

512k

1024k

2048k

4096k

8192k

16384k

32768k

No Limit

Apply Refresh

You can set up storm control by configuring the modes.

Monitoring: Statistics Overview for All Ports

The screenshot shows a web interface for a 24 Port Gigabit Ethernet Switch. The title bar reads "24 Port Gigabit Switch - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/". The main content area has a blue header "24 Port Gigabit Ethernet Switch" and a sub-header "Statistics Overview for all ports". On the left, there is a sidebar with navigation links: Configuration (selected), System, Ports, VLANs, Aggregation, LAG, RSTP, 802.1X, IGMP Snooping, Mirroring, Quality of Service, Filter, Rate Limit, and Storm Control. Below this is a "Monitoring" section with links: Statistics Overview (selected), Detailed Statistics, LAG, RSTP, 802.1X, IGMP Status, VeriPHY, Ping, and Maintenance. Under Maintenance, there are links: Warm Restart, Factory Default, Software Upload, Configuration File Transfer. The main table displays statistics for 16 ports. Port 4 is highlighted with a red border.

Port	Tx Bytes	Tx Frames	Rx Bytes	Rx Frames	Tx Errors	Rx Errors
1	0	0	0	0	0	0
2	0	0	0	0	0	0
3	0	0	0	0	0	0
4	98880	207	63304	539	0	0
5	0	0	0	0	0	0
6	0	0	0	0	0	0
7	0	0	0	0	0	0
8	0	0	0	0	0	0
9	0	0	0	0	0	0
10	0	0	0	0	0	0
11	0	0	0	0	0	0
12	0	0	0	0	0	0
13	0	0	0	0	0	0
14	0	0	0	0	0	0
15	0	0	0	0	0	0
16	0	0	0	0	0	0

You can read statistics for all ports.

Monitoring: Detailed Statistics


The screenshot displays a web-based management interface for a 24 Port Gigabit Ethernet Switch. The main title is "24 Port Gigabit Ethernet Switch". Below it, a sub-section title is "Statistics for Port 1". On the left, there is a sidebar with several links under "Configuration", "Monitoring", and "Maintenance". Under "Configuration", the links are: System, Ports, VLANs, Aggregation, LACP, RSTP, 802.1Q, IGMP Snooping, Mirroring, Quality of Service, Firewall, Rate Limit, and Storm Control. Under "Monitoring", the links are: Statistics Overview, Detailed Statistics, LACP Status, RSTP Status, IGMP Status, VoIP/HY, and Ping. Under "Maintenance", the links are: Warm Restart, Factory Default, Software Upload, Configuration File, and Transfer. In the center, there is a table showing "Receive Total" and "Transmit Total" statistics for Port 1. The table has two columns: "Receive Total" and "Transmit Total". Under "Receive Total", the rows are: Rx Packets (0), Rx Octets (0), Rx High Priority Packets (-), Rx Low Priority Packets (-), Rx Broadcast (-), Rx Multicast (-), Rx Broad- and Multicast (0), and Rx Error Packets (0). Under "Transmit Total", the rows are: Tx Packets (0), Tx Octets (0), Tx High Priority Packets (-), Tx Low Priority Packets (-), Tx Broadcast (-), Tx Multicast (-), Tx Broad- and Multicast (0), and Tx Error Packets (0). The table also includes a header row with columns for Port 1 through Port 8.

Port 1	Port 2	Port 3	Port 4	Port 5	Port 6	Port 7	Port 8
Port 9	Port 10	Port 11	Port 12	Port 13	Port 14	Port 15	Port 16
Port 17	Port 18	Port 19	Port 20	Port 21	Port 22	Port 23	Port 24

Receive Total		Transmit Total	
Rx Packets	0	Tx Packets	0
Rx Octets	0	Tx Octets	0
Rx High Priority Packets	-	Tx High Priority Packets	-
Rx Low Priority Packets	-	Tx Low Priority Packets	-
Rx Broadcast	-	Tx Broadcast	-
Rx Multicast	-	Tx Multicast	-
Rx Broad- and Multicast	0	Tx Broad- and Multicast	0
Rx Error Packets	0	Tx Error Packets	0
Receive Size Counters		Transmit Size Counters	
Rx 64 Bytes	-	Tx 64 Bytes	-
Rx 65-127 Bytes	-	Tx 65-127 Bytes	-
Rx 128-255 Bytes	-	Tx 128-255 Bytes	-
Dv 256-511 Bytes	-	Tv 256-511 Bytes	-

You can have detailed statistics of each port by clicking the port number.

Monitoring: LACP Status

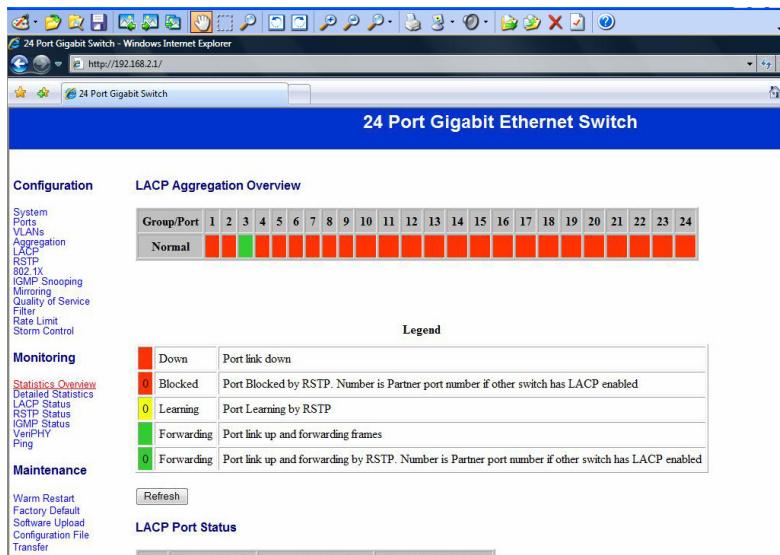

You can read LACP status for LACP ports.

Monitoring: RSTP Status

24 Port Gigabit Ethernet Switch

RSTP VLAN Bridge Overview

VLAN Id	Bridge Id	Hello Time	Max Age	Fwd Delay	Topology	Root Id
1	32769-00-03-ce-07-06-f1	2	20	15	Steady	This switch is Root!

RSTP Port Status

Port/Group	Vlan Id	Path Cost	Edge Port	P2p Port	Protocol	Port State
Port 1						Non-STP
Port 2						Non-STP
Port 3						Non-STP
Port 4						Non-STP
Port 5						Non-STP
Port 6						Non-STP
Port 7						Non-STP
Port 8						Non-STP
Port 9						Non-STP
Port 10						Non-STP

You can read RSTP status for RSTP ports.

Monitoring: IGMP Status

VLAN	ID	Querier	Queries transmitted	Queries received	v1 Reports	v2 Reports	v3 Reports	v2 Leaves
1	1	Idle	0	0	0	0	0	0

You can read IGMP status for IGMP ports.

Monitoring: VeriPHY Cable Diagnostics

Cable Status		
Pair	Length [m]	Status
A	-	-
B	-	-
C	-	-
D	-	-

You can read VeriPHY cable status for all ports which you want to check by clicking the port number and the mode.

Monitoring: Ping Parameters

24 Port Gigabit Ethernet Switch

Ping Parameters

Target IP address	
Count	1
Time Out (in secs)	1
	5
	10
	30

Ping Results

Target IP address	0.0.0.0
Status	Test complete
Received replies	0
Request timeouts	0
Average Response Time (in ms)	0

Refresh


You can set target IP address by setting the mode which you want.

Monitoring: Warm Restart



You can select yes/no to do the warm restart, and then the new settings will change according to your selection.

Maintenance: Factory Default

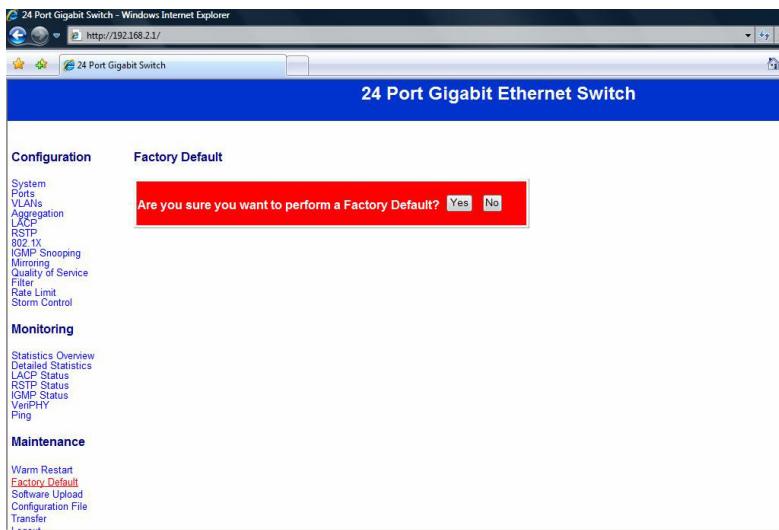

You can select yes/no to perform a Factory Default, and then the new settings will change according to your selection.

Maintenance: Software Upload

The screenshot shows a web browser window for a '24 Port Gigabit Switch' at the URL <http://192.168.2.1/>. The title bar reads '24 Port Gigabit Ethernet Switch'. The left sidebar has a tree view with nodes like System, Ports, VLANs, Aggregation, LACP, RSTP, 802.1x, IGMP Snooping, Mirroring, Quality of Service, Firewall, Rate Limit, and Storm Control under Configuration; and Monitoring, Statistics Overview, Detailed Statistics, LACP Status, RSTP Status, IGMP Status, Verify, and Ping under Monitoring. The main content area is titled 'Software Upload' and contains a file input field with a 'Browse...' button and an 'Upload' button.

Follow the instruction on the screen to upload the new software.

Maintenance: Configuration Upload

The screenshot shows a web-based management interface for a 24 Port Gigabit Ethernet Switch. The title bar reads "24 Port Gigabit Switch - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/". The main header is "24 Port Gigabit Ethernet Switch". On the left, there's a navigation menu with sections: Configuration (System, Ports, VLANs, Aggregation, LACP, RSTP, 802.1X, GMRP Snooping, Mirroring, Quality of Service, Ping, Rate Limit, Storm Control), Monitoring (Statistics Overview, Detailed Statistics, LACP Status, RSTP Status, GMRP Status, VxLAN/Y, Ping), and Maintenance (Warm Restart, Factory Default, Software Upload, Configuration File Transfer). The "Configuration File Transfer" option under Maintenance is highlighted in red. The central area has two main sections: "Configuration Upload" with a file input field and "Browse..." button, and "Configuration Download" with a "Download" button.

Follow the instruction on the screen to upload and download the configuration.

Logout

When you forgot your IP or password, please use the reset button for the factory default setting?

Please take the following steps to reset the Web Smart Switch back to the original default:

Step 1:

Turn on the Web Smart Switch

Step 2:

Press and hold the reset button continuously for 15 seconds and release the reset button.

Step 3:

The switch will reboot for 20 seconds and the configuration of switch will back to the default setting.

Please enter password to login

Password:

Apply

Key in the password to pass the authentication; the user password is “admin”.

IP: 192.168.2.1

Password: admin