


Console Reset Nusoft

MH/MS/ML/IR/MHG/UTM/MLS/IDR/MAF/NFW 系列

1. Use console cable connects the console port of MH-700 or MS700 to PC com port
2. Open HyperTerminal or putty



3. Create a new connection and select com port setting

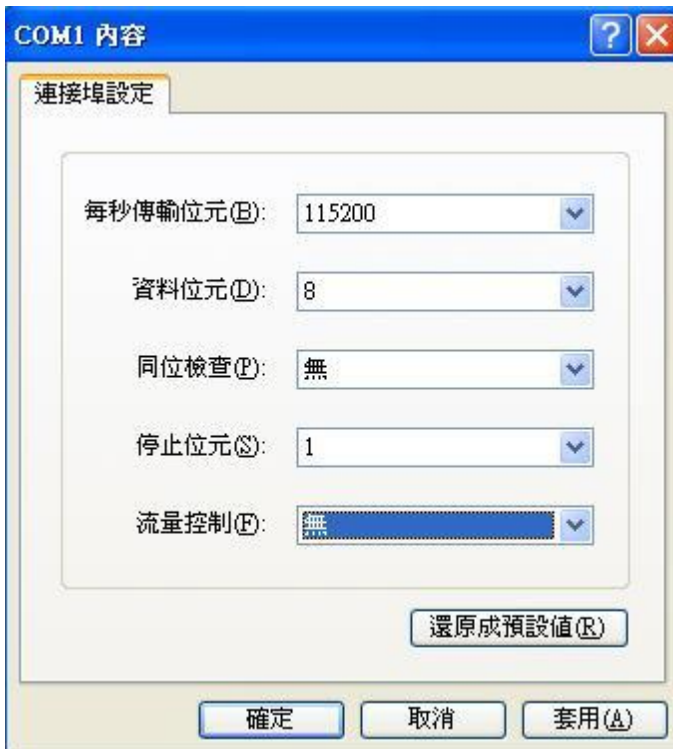

其他設備請看Console Port 9600或是115200

4. Press "Enter" button to enter console mode

5. The username and password are both "itsecurity"

舊版本帳號和密碼為 "multihoming"

2016的版本可以用admin/你設定的password

或是 itsecurity/機器的MAC Address大寫

6. Enter "reset" command

其他功能請輸入"? "查詢

?=help

7. Firewall will be restored to factory default after 10 min

8. Login http://192.168.1.1 with username and password are both "admin".